



Model 728A/728T High sensitivity, low-noise accelerometers

Features

- Wide frequency range
- Low noise floor
- Hermetically sealed
- Temperature compensated
- Wide dynamic range
- Small size, light weight
- Miswiring protection



Model 728A

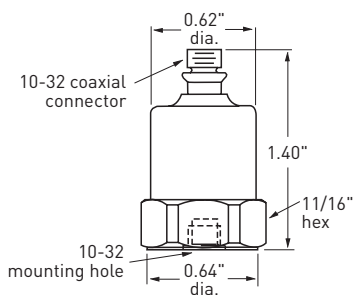

Model 728T

Dynamic

Sensitivity, $\pm 5\%$, 25 °C	500 mV/g
Acceleration range	15 g peak
Amplitude nonlinearity	1 %
Frequency response	
$\pm 5\%$	3 - 5,000 Hz
± 3 dB	1 - 10,000 Hz
Resonance frequency, mounted, nominal	24 kHz
Transverse sensitivity, max.	7 % of axial
Temperature response:	
-50°C	- 10%
+120°C	- 5%

Electrical

Power requirement: voltage source	18 - 30 VDC
current regulating diode	2 - 10 mA
Electrical noise, equiv. g, nominal:	
Broadband 2.5 Hz to 25 kHz	30 μ g
Spectral 10 Hz	5.0 μ g/VHz
100 Hz	0.4 μ g/VHz
1000 Hz	0.1 μ g/VHz
Output impedance, max.	100 Ω
Bias output voltage, nominal	10 VDC
Grounding	
728A	case grounded
728T	base isolated

Environmental

Temperature range	-50 to 120 °C
Vibration limit	250 g peak
Shock limit	2500 g peak
Electromagnetic sensitivity @ 60 Hz	20 μ g/gauss
Base strain sensitivity	0.002 g/ μ strain

Physical

Weight	44 grams
Case material	stainless steel
Mounting	10-32 tapped hole
Output connector	10-32 coaxial
Mating connector	R1
Recommended cable	J93

Accessories supplied: SF1 mounting stud, calibration date (Level 3)

Accessories available: R1-2-J93-10 cable assembly, magnetic mounting bases, SF5 cementing studs, SF4 isolation mounting base, signal conditioners

Wilcoxon Research Inc
20511 Seneca Meadows Parkway
Germantown, MD 20876
USA

Tel: 301 330 8811
Fax: 301 330 8873
Email: wilcoxon@meggitt.com

www.meggitt.com

MEGGITT
smart engineering for
extreme environments