

Low acceleration sensitivity hydrophone H601


SPECIFICATIONS

Output sensitivity	-205 dB re 1V/μPa
Acceleration sensitivity	typ. -60 dB re 1V/g
Capacitance	605 pF
Packaging size	0.650" dia. x 0.765" length
Weight	16 grams
Specific gravity in water	4.1
Grounding	case isolated
Sealing	hermetic
Sensing material	Aged, Navy type II
Packaging material	stainless steel
Operating pressure	2500 psi, max
Operating temperature	60°C, max
Protection tube packaging size	0.781" dia. x 1.500" length
Cable	wire, single conductor, polyurethane jacket



Key features

- Extremely low acceleration sensitivity
- Hermetic seal
- Electrically shielded
- Manufactured in ISO 9001 facility

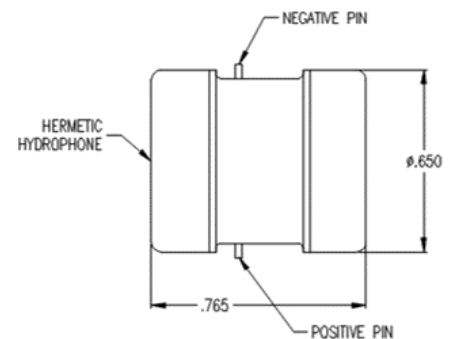

Note: Due to continuous process improvement, specifications are subject to change without notice.