

Accelerometer

FN8-6A CVLD

PRELIMINARY

SPECIFICATIONS

Measurement range	±5 g
Sensitivity (100 Hz)	1 mA/g
Transverse sensitivity	<3%
Nonlinearity, 5°C < T < 25°C	±1% max (ref. 20°C), typically <0.3%
Passband:	
at ±10%	5 Hz - 10 kHz
at ±3 dB	1 Hz - 16 kHz
Resonance frequency	>25 kHz
Power supply rejection	>40 dB
Background noise:	
5 Hz - 10 kHz	<0.1 mg
1/3 octave from 10 Hz to 1 kHz	<0.02 mg
Power requirement, voltage source	9 - 16 VDC
Bias output current, nominal	10 mA
Insulation (electronics to case)	50 MΩ, min.
Grounding	case isolated, internally shielded
Base strain sensitivity	<0.75 g for 250 μstrain
Acoustic sensitivity	<0.1 mg
100 dB SPL 1/3 octave	
100 - 10,000 Hz	
Sensitivity to environment:	
Magnetic (B=0.75 mT)	<2 mg
Magnetic (per IT 8839)	<10 μV, typical
Pressure (700 < P < 1300 mB)	<0.1 mg
Shock limit, max (half sine, 0.5 ms)	5,000 g
Sealing	hermetic
Storage temperature range	-40° to +70°C
Weight	TBD grams, nominal
Case material	316L stainless steel
Mounting	M6x1 - 6g (see drawing on reverse)
Output connector	2 pin MIL-C-5015 style
Mating connector	R6 type
Recommended cabling	shielded, twisted pair, halogen-free

See reverse for dimensions.

PRELIMINARY



Note: Due to continuous process improvement, specifications are subject to change without notice.

This document is cleared for public release. Product may be subject to US export controls and restrictions under the ITAR or the EAR, please consult factory for export control status.

Accelerometer FN8-6A CVLD

PRELIMINARY

Dimensions

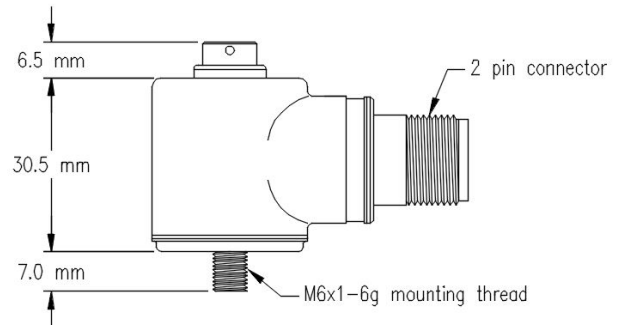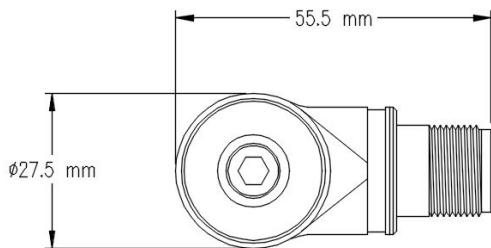

PRELIMINARY

Note: Due to continuous process improvement, specifications are subject to change without notice.
This document is cleared for public release. Product may be subject to US export controls and restrictions under the ITAR or the EAR, please consult factory for export control status.