

Shaker system power amplifier

PA10A

SPECIFICATIONS

Output

Maximum power output, rated at 4Ω load	400 watts
Frequency response, -3 dB	0.4 Hz to 40 kHz
Distortion ¹	< 0.1%
Current limit	18A peak
Front panel	Two row, four function keys LCD

Protection

Interlock Switch
DC Fault Detection
Clip Detection
Over-Current / Over-Temperature Detection
Safe Start in Mute Mode

Input impedance	10 kΩ
Output impedance	30 kΩ
Input connector	BNC jack
Output connector	Screw terminals
Maximum output	38 V RMS
Maximum signal gain, adjustable	26 dB
Size (H x W x D)	3.5 x 17.3 x 14.6 in (9 x 44 x 37 cm)
Weight	8.5lb (3.8 kg)
Power requirements	100-120 VAC or 220-240 VAC


Accessories supplied: Power cable, rack mounting brackets, rubber feet, spare fuses

Notes: ¹ THD 0.1% at 4 Ω impedance, 1 kHz max output voltage. THD 0.04% at 4 Ω impedance, 1 kHz full output power.



Key features

- Silent operation for a noise-free test environment
- Supplies 400 W output power at 4 Ω load impedance
- Flat frequency response to 40 kHz
- Lightweight—just 8.5 lb (3.8 kg)
- Front panel adjustable gain up to 26 dB

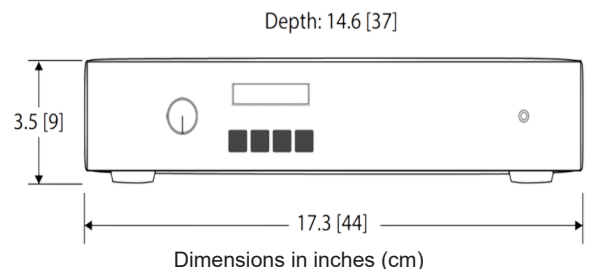

Note: Due to continuous process improvement, specifications are subject to change without notice.